


Maestro Occupancy Sensor LED+ Dimmer

Lutron Maestro occupancy sensor LED+ dimmers (formerly C•L) are lighting controls with passive infrared sensors that automatically control the lights in an area. These sensors detect heat from occupants moving within an area to determine when the space is occupied. The Maestro occupancy sensor LED+ dimmer combines a Maestro LED+ dimmer with an occupancy or vacancy sensor.

Features

- Controls LED, CFL, incandescent, and halogen load types¹
- Passive infrared motion detection with exclusive Lutron XCT Technology for fine motion detection
- 180° sensor field-of-view
- Up to 30 ft x 30 ft (9 m x 9 m) [900 ft² (81 m²)] major motion coverage and 20 ft x 20 ft (6 m x 6 m) [400 ft² (36 m²)] minor motion coverage
- Occupancy version can be set to auto-on/auto-off or manual-on/auto-off
- Vacancy version available to meet CA Title 24 requirements
- Adjustable timeout (1, 3, 5, 15, or 30 minutes) and high/low sensitivity adjustment
- Adjustable settings for auto-on light level (occupied level): 100%, 50%, last light level, or locked preset light level
- Off warning fades lights to off over a period of 10 seconds
- Advanced Maestro dimmer features available (locked preset, fade-to-on, and fade-to-off, etc.)
- All models have single pole and multi-location capability
- Works with a single standard mechanical 3-way switch or up to 9 companion dimmers/switches (MA-R or MSC-AD)²

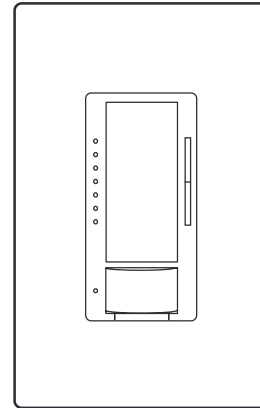

Models Available

| Model Number | Description | Sensor Operation | Maximum Capacity |
|--|--|---|--|
| MSCL-OP153M-XX ^{3,4} MSCL-OP153MH-XXC ^{3,5} | Occupancy/vacancy single-pole/ multi-location | Auto-on/auto-off or manual-on/auto-off | 600 W Incandescent/Halogen 150 W LED/CFL ¹ |
| MSCL-VP153M-XX ^{3,4} | Vacancy single-pole/multi-location | Manual-on/auto-off | 600 W Incandescent/Halogen 150 W LED/CFL ¹ |

¹ For a complete list of compatible dimmable LEDs please visit www.lutron.com/LEDfinder

² If using with standard mechanical 3-way switch, some rewiring and dimmer programming is required

³ "XX" in model number represents color/finish code

⁴ For clamshell packaging, add an "H" after the "M". Available in AL, IV, LA, and WH

⁵ Clamshell packaged product for Canada. Available in AL, IV, LA, and WH

| | | |
|---|--|---|
| Job Name: <input style="width: 90%; height: 20px;" type="text"/> | Model Numbers: <input style="width: 60%; height: 20px;" type="text"/> <input style="width: 35%; height: 20px;" type="text"/> | |
| Job Number: <input style="width: 100px; height: 20px;" type="text"/> | <input style="width: 100%; height: 20px;" type="text"/> | <input style="width: 100%; height: 20px;" type="text"/> |

Specifications

Regulatory Approvals

- UL Listed to U.S. and Canadian safety requirements
- Title 20/24 certified lighting control device
 - Complies with Title 20 and Title 24 Section 119 (Until Jan 1st, 2014)
- Title 20/24 certified lighting control device
 - Complies with Title 20 and Title 24 Section 110.9 (After Jan 1st, 2014)
- NOM Certified

Power

- Operating voltage: 120 V~ 60 Hz

Environment

- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0%-90% humidity, non-condensing; indoor use only

Warranty

- 5 Year Limited Warranty

For additional Warranty information, please visit: www.lutron.com/TechnicalDocumentLibrary/Sensor_Warranty.pdf

Key Design Features

Dimmer

- On a single-tap, lights fade ON or OFF
- On a double-tap, lights go to full ON
- When ON, press and hold to engage a long fade to OFF
- Light levels can be fine-tuned by pressing and holding the dimming rocker until the desired light level is reached

Custom Sensor Settings

Timeout Options

- 1 Minute
- 3 Minute
- 5 Minutes (default)
- 15 Minutes
- 30 Minutes
- Test Mode
 - Short (less than 15-second) timeout for testing sensor coverage. After entering, device will exit test mode automatically after 5 minutes, or when any button is pressed.

Sensitivity Options

- High sensitivity (default)
- Low sensitivity

Auto-ON Options

- Occupancy (default): Auto-ON/Auto-OFF
 - Occupancy Mode is also called “Auto-On: Enabled”
- Vacancy*: Manual-ON/Auto-OFF
 - Vacancy Mode is also called “Auto-On: Disabled”

* There is a 15-second grace period that begins when the lights are automatically turned off, during which the lights will automatically turn back on in response to motion. This grace period is provided as a safety and convenience feature in the event that the lights turn off while the room is still occupied, so that the user does not need to manually turn the lights back on. After 15 seconds, the grace period expires and the lights must be manually turned on.

- Ambient Light Detection (ALD): Lights turn on only if natural light in room is low
 - Smart—Ambient light threshold adjusts to the user’s preference**

** If sensor turns on when there is enough natural light, or if sensor does not turn on when there is not enough natural light, press the large button within 5 seconds of entering the room. Over time, this interaction will “teach” the sensor your preferred setting.

- Off While Occupied (OWO)
 - When the sensor dimmer is manually turned off, the sensor dimmer will not turn the lights back on automatically while the room is occupied.
 - Once the room is vacated, the Auto-ON feature returns to normal operation after the timeout period has expired.
 - This may be the preference in conference rooms or classrooms while viewing presentations. This feature requires motion to keep the lights off.

Occupied Level Options

Occupied Level is the light level that the sensor dimmer will turn ON to when motion is detected.

- 100% (default)
- 50%
- Preset
 - While in preset mode, lights will automatically turn to the last level or to the “Locked Preset” level if a “Locked Preset” has been selected in Advanced Programming.

| | | |
|---|--|---|
| Job Name: <input style="width: 90%; height: 20px;" type="text"/> | Model Numbers: <input style="width: 60%; height: 20px;" type="text"/> <input style="width: 35%; height: 20px;" type="text"/> | |
| Job Number: <input style="width: 100px; height: 20px;" type="text"/> | <input style="width: 100%; height: 20px;" type="text"/> | <input style="width: 100%; height: 20px;" type="text"/> |

Load Type and Capacity

| Control | Voltage | Load Type ¹ | Minimum Load | Maximum Load | | | Neutral Connection Required |
|----------------------------|---------|--|--|--------------------------------------|--------------------------------------|--------------------------------------|-----------------------------|
| | | | | Not Ganged | End of Gang | Middle of Gang | |
| MSCL-OP153M MSCL-VP153M | 120 V~ | Incandescent, Halogen, LED, CFL ² | 1 bulb, or as noted on approved bulb list ³ | 600 W incan/halogen or 150 W LED/CFL | 500 W incan/halogen or 150 W LED/CFL | 400 W incan/halogen or 150 W LED/CFL | NO |

¹ Dimmer Load Type: designed for use with permanently installed lighting fixtures only. Do not install dimmers to control receptacles or motor-operated appliances.
² For mixed load types, see **Mixed Load Type and Capacity** section.
³ For a complete list of approved Dimmable LEDs, please visit www.lutron.com/LEDfinder

Mixed Load Type and Capacity

Determine allowable wattage (W) of dimmer by following the steps below. If multiple dimmers are to be installed adjacently in the same wallbox, derating is required.

Derating Chart

- Determine total wattage of LED/CFL bulbs installed for dimmer control.
- Determine total wattage of incandescent/halogen bulbs to be controlled by the dimmer.
- Use the Derating Chart to determine if your total wattages are within the allowable range of your configuration.
- Derating Procedure** (if necessary)
If multiple dimmers are installed adjacently in the same wallbox, heat fins MUST be removed between adjacent dimmers. This will permanently derate the dimmer, reducing its total allowable incandescent/halogen wattage.

Derating Chart

Placing dimmers adjacent to mechanical switches does not require derating.

A


B B

B C B

| | Incandescent/Halogen : Total Wattage | | |
|-----------------|--------------------------------------|--------------|--------------|
| LED CFL | A | B | C |
| Total W LED/CFL | | | |
| 0 W | 10 W – 600 W | 10 W – 500 W | 10 W – 400 W |
| 1 W – 25 W | 0 W – 500 W | 0 W – 400 W | 0 W – 300 W |
| 26 W – 50 W | 0 W – 400 W | 0 W – 300 W | 0 W – 200 W |
| 51 W – 75 W | 0 W – 300 W | 0 W – 200 W | 0 W – 100 W |
| 76 W – 100 W | 0 W – 200 W | 0 W – 100 W | 0 W – 50 W |
| 101 W – 125 W | 0 W – 100 W | 0 W – 50 W | 0 W |
| 126 W – 150 W | 0 W | 0 W | 0 W |

Example

If heat fins from one side of dimmer are removed (see **B** in chart) and you have three 10 W LED bulbs installed (Total LED Wattage = 30 W), you may add up to 300 W of incandescent/halogen lighting.



Additional Information


- For Maestro occupancy sensor switch models, please see Lutron P/N 369666 at www.lutron.com
- Customer Assistance: 1.844.LUTRON1

| | |
|--|---|
| Job Name: <input style="width: 90%;" type="text"/> | Model Numbers: <input style="width: 95%;" type="text"/> |
| Job Number: <input style="width: 80%;" type="text"/> | <input style="width: 95%;" type="text"/> |


Maestro Occupancy Sensor LED+ Dimmer Placement and Operation

- The ability of the sensor dimmer to detect motion requires line-of-sight of room occupants. The sensor dimmer must have an unobstructed view of the room.
- Hot objects and moving air currents can affect the performance of the sensor dimmer. For best performance, the sensor dimmer should be mounted at least 4 ft (1.2 m) away from HVAC vents and light bulbs.
- The performance of the sensor dimmer depends on a temperature differential between the ambient room temperature and that of room occupants. Warmer rooms may reduce the ability of the sensor dimmer to detect occupants.


NEMA WD7 Test Grid Coverage (High Sensitivity Setting)

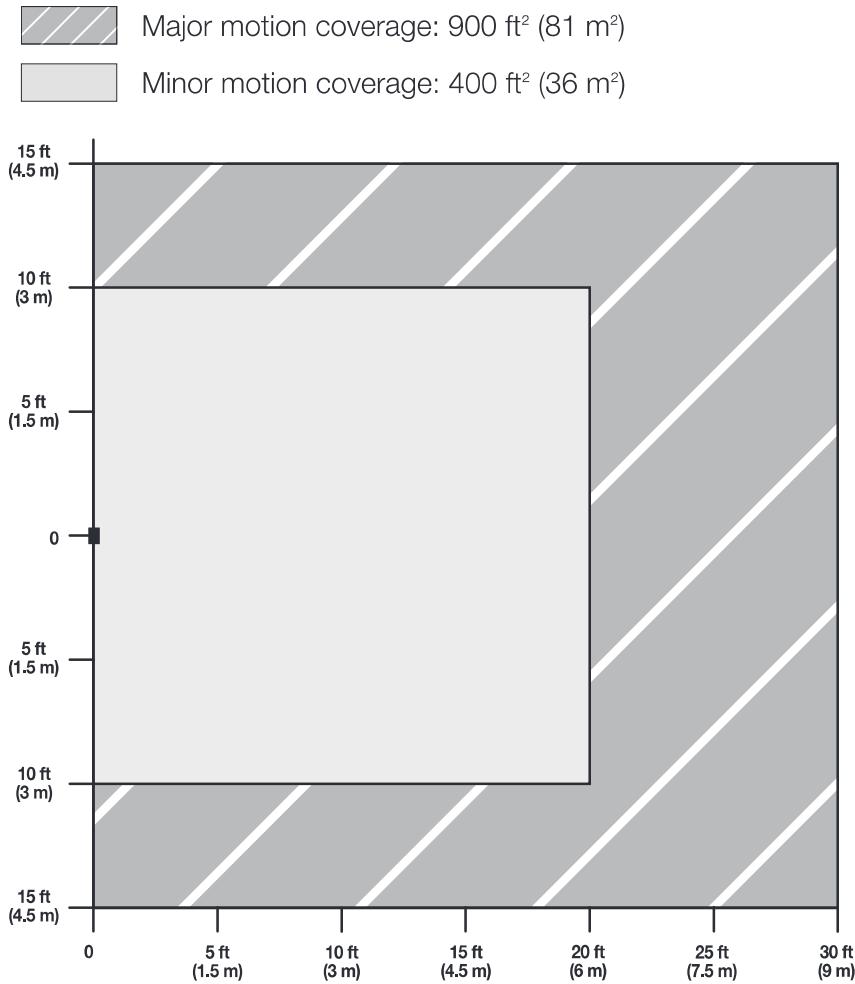

Horizontal Beam Diagram

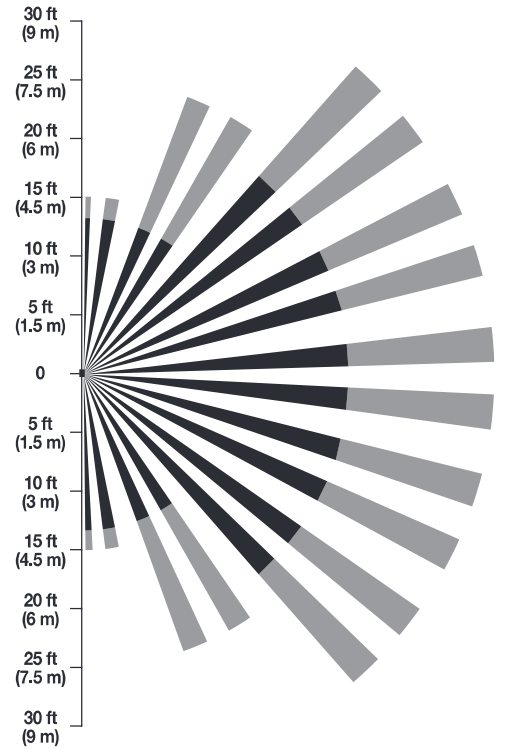


Vertical Beam Diagram

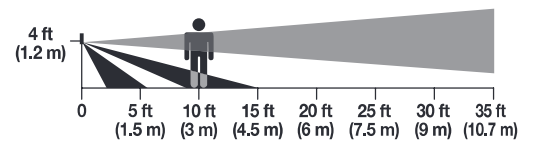

| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Operation

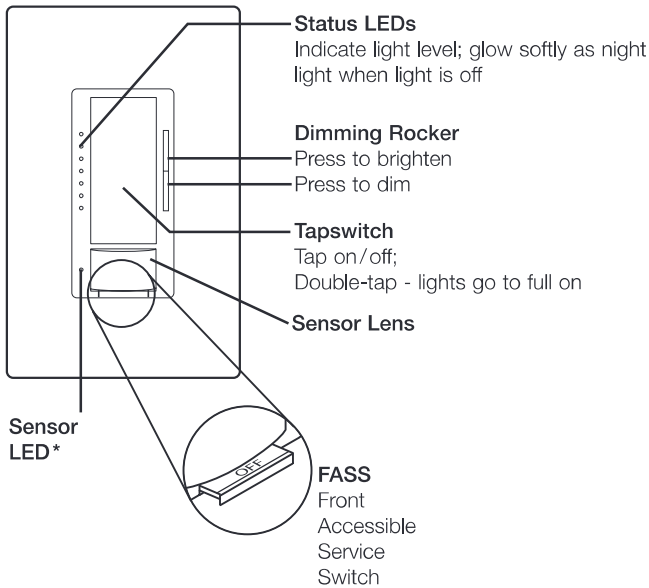


NOTE:

* LED only pulses to acknowledge motion when there is motion AND the load is ON.

IMPORTANT NOTICE:

FASS – Front Accessible Service Switch – to service load, remove power by pulling the FASS switch out completely on either the sensor dimmer or companion dimmer. After servicing load, push the FASS switch back in fully to restore power to the control. Once power has been restored, the sensing dimmer can be manually turned on or off but will not automatically control the load for the first 2 minutes.

Mounting

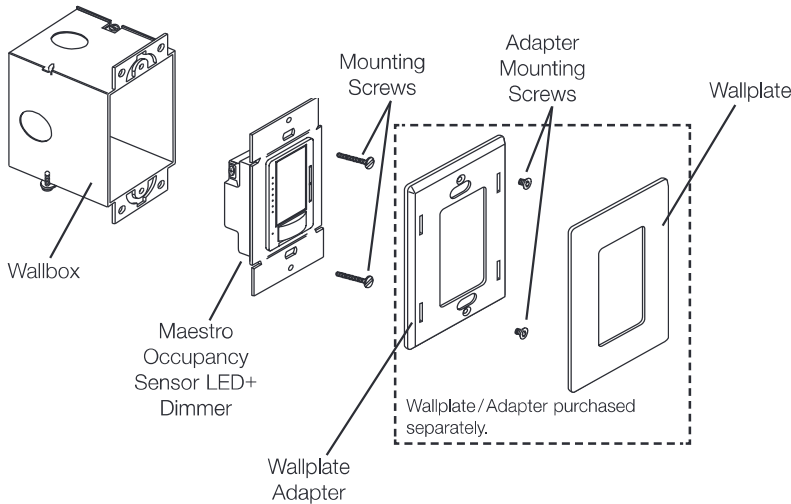


| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |


Dimensions

Measurements shown as: in (mm)

Front View

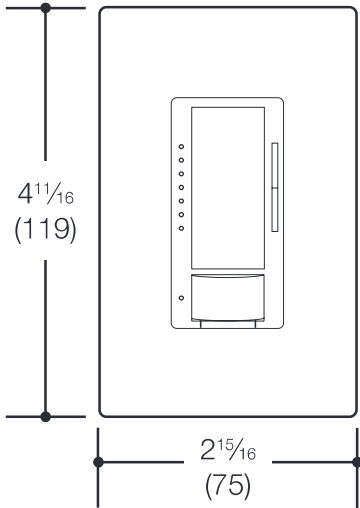

Side View

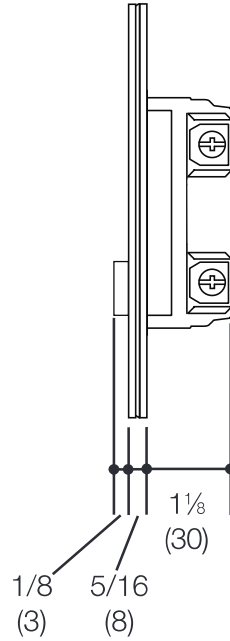

Note: MSCL-OP153M and MSCL-VP153M have screw terminals.


| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Wiring Diagrams

Wiring Diagram 1

Single Location Installation¹


MSCL-OP153M and MSCL-VP153M

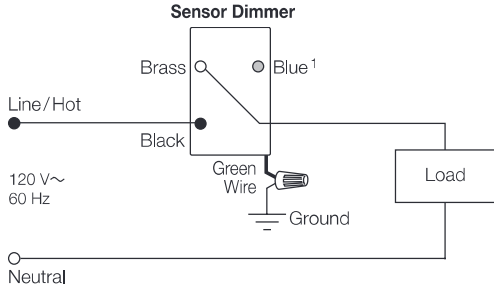

Wiring Diagram 2

Multi-Location Installation^{2, 3, 4}

MSCL-OP153M and MSCL-VP153M with MA-R or MSC-AD

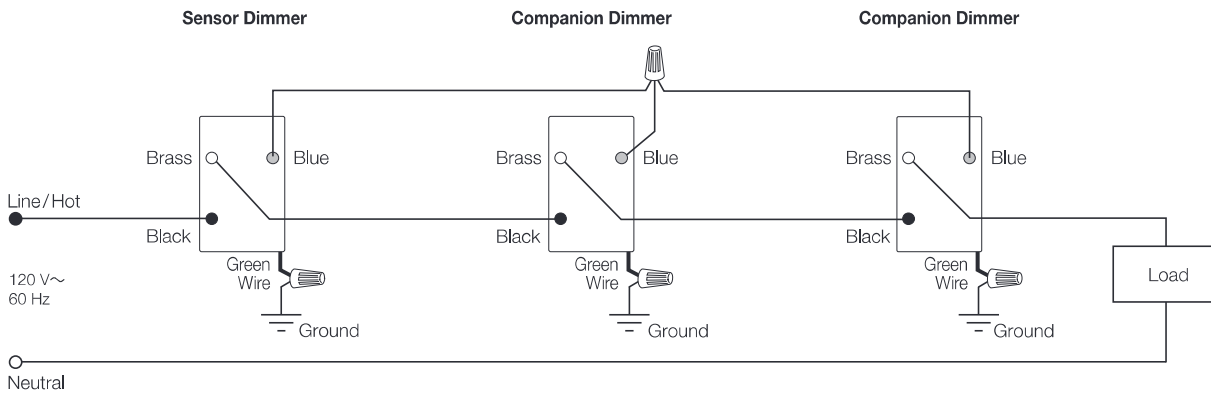

¹ When using controls in single location installations, tighten the blue terminal. **Do not** connect the blue terminal to any other wiring or to ground.

² Up to 9 companion dimmers may be connected to a sensor dimmer. Total blue terminal wire length may be up to 150 ft (46 m).

³ Only one sensor dimmer can be used per multi-location circuit.

⁴ Sensor dimmer can be installed in any location in the circuit.


| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Wiring Diagrams *(continued)*


Wiring Diagram 3

3-way Installation with Standard Mechanical Switch (120 V~)^{1, 2}

MSCL-OP153M and MSCL-VP153M

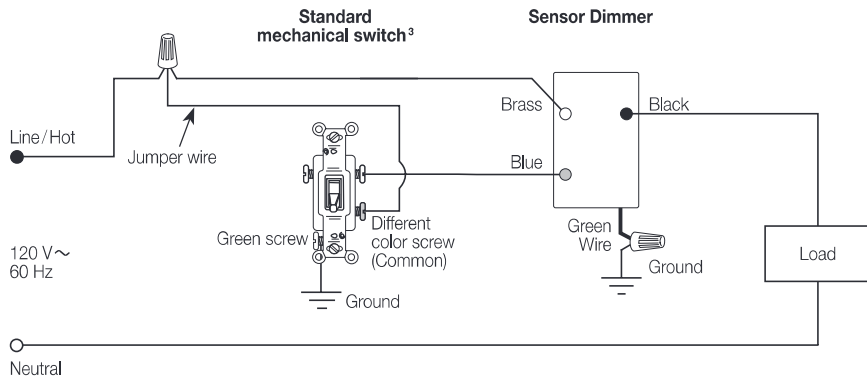

OR

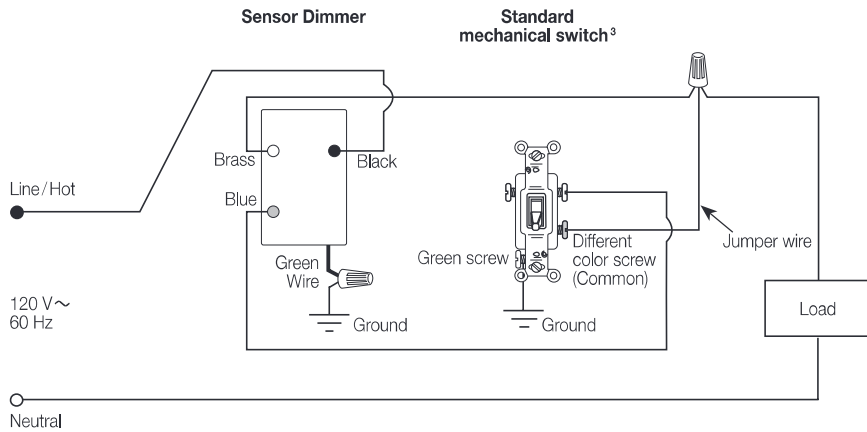

¹ Only one sensor dimmer can be used per multi-location circuit.


² A single standard mechanical 3-way switch or up to 9 companion dimmers may be connected to a sensor dimmer. Standard mechanical 3-way switch cannot be combined with companion dimmer. Total blue terminal wire length may be up to 150 ft (46 m).

³ Diagram 3 shows a typical retrofit scenario, where one mechanical 3-way switch is being replaced with a sensor dimmer. The remaining mechanical 3-way switch needs to be modified to effectively convert it to a single pole switch. For new construction, a standard mechanical single pole switch can be used here.

| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Colors and Finishes


Gloss Finishes



White
WH




Ivory
IV




Almond
AL




Light
Almond
LA



Gray
GR



Brown
BR



Black
BL

Satin Finishes



Snow
SW



Midnight
MN



Taupe
TP



Biscuit
BI



Eggshell
ES



Palladium
PD



Hot
HT




Merlot
MR



Plum
PL




Sienna
SI




Terracotta
TC




Bluestone
BG




Greenbriar
GB



Goldstone
GS




Mocha
Stone
MS



Stone
ST



Desert
Stone
DS



Limestone
LS

For the latest color offerings please see our website: <http://www.lutron.com/satincolors>

Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.

Lutron, Lutron, C•L, FASS, LED+, and Maestro are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.

| | | |
|--|---|----------------------|
| Job Name: <input type="text"/> | Model Numbers: <input type="text"/> | |
| Job Number: <input type="text"/> | <input type="text"/> | <input type="text"/> |