



## DTM-7.4

Network Stereo Receiver with HDMI

### INTEGRA DTM-7.4 OVERVIEW


- 110W/ch x 2ch fully discrete amplifier
- 8K HDMI 4 in/1 out with ARC
- Chromecast built-in, AirPlay2, Roon ready
- 768kHz/32bit Premium D/A converter
- Custom-built components for Audio
- Dedicated Phono Circuit board for MM/MC
- Full suite of custom integration software tools
- Works with Sonos for power and volume sync

### HI-FI FOR ALL, BUILT FOR INTEGRATORS

Designed and engineered with meticulous attention to detail, the Integra DTM-7.4 Stereo Receiver offers audiophile-grade sound alongside cutting-edge connectivity options and a full suite of custom installation features. This compact 2-channel receiver seamlessly integrates into any home entertainment system, delivering high-resolution audio output while optimizing space efficiency.



# Integra®

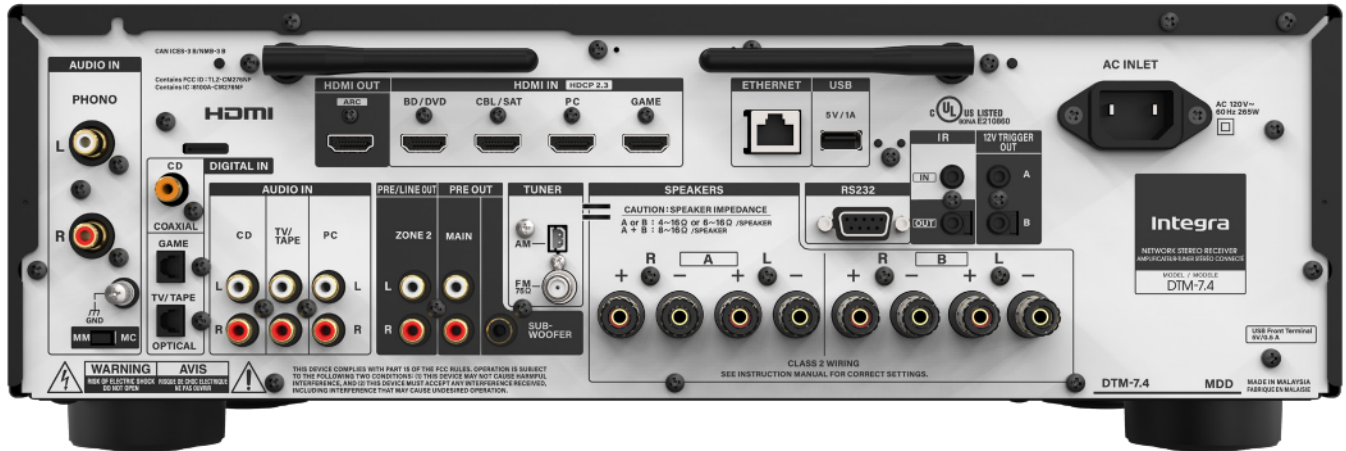

<b>AUDIO</b>	110W/ch x 2ch (8Ω, 20-20kHz, 0.08% THD)
	Frequency response 5Hz - 100kHz (+1/-3dB Direct Mode)
	Speaker impedance: 4-16 ohms
	Tone control Bass(100Hz) & Treble (10KHz): +/- 10dB
	768KHz/32bits D/A converter - AK4452
<b>INPUTS/ OUTPUTS</b>	Dedicated MM/MC Phono Circuit Board
	HDMI 4in / 1out – all supports 8K up to 40Gbps, and ARC
	Audio input: 3 Analog, 2 Optical, 1 Coaxial, Phono inputs, and Front/Rear USB
	Audio output: Main and subwoofer pre-out, Zone2 Pre/lineout
	Wifi and Ethernet
	AM/FM Tuner
	Gold plated speaker terminals
<b>NETWORK</b>	Roon Ready certified
	Chromecast built-in for audio, and AirPlay2
	Music services: Spotify, Amazon Music HD, Tidal, Deezer, Pandora and TuneIn radio
	Bluetooth receiver from mobiles and PC (SBC/AAC)

<b>CONTROL AND SERVICE</b>	Web setup, download configuration files via browser
	Front ping button (“Display” key) to see the IP address
	IP control, RS232, IR in/out, and 12v triggers
	Control and remote diagnostic (C4, Crestron, OvrC, Domotz)
	Compatible with OVRC Pro, Domotz, Luxul Pro Watch, VPN, and other monitoring platforms
	Onboard diagnostics tool kit, including test patterns and EDID/HDCP adjustment, virtual remote; all available via web app
	Integra’s most robust API ever, with discrete commands for virtually any AVR function
<b>RACK KIT</b>	Optional Rack-Mount Kit Available (IRK-155-3D)
	<b>DIMENSIONS</b> 17 1/8” x 5 7/8” x 12 15/16” (435 x 149 x 328 mm)
	<b>WEIGHT</b> 19.8lbs (9.0kg)
	<b>POWER CONSUMPTION</b> 275W, 35W at idle, < 2W at standby

Due to a policy of continuous product improvement, Integra reserves the right to change specifications and appearance without notice.