Dual Cooling Fans Ventilation
This enclosure features dual 4" vents and dual thermostat-controlled cooling fans. The low noise, high airflow fans help maintain lower internal temperatures by providing air flow through the enclosure. The fans turn on when the internal temperature reaches 100°F (38°C) and turn off when it drops to 79°F (26°C). Both fans are wired internally so they do not require the use of the AC outlets leaving them available for internal equipment use. Rain shrouds on the front door keep rainwater from entering the enclosure.

Multi-Cable Cable Glands
Pre-installed are (2) of our unique multi-cable cable glands. These cable glands can accommodate up to five pe-terminated cables. This helps reduce the number of cable glands needed and allows the cables to be better bundled together.

Mounting
Stainless steel brackets are included for secure wall mounting. Optional flange and pole mounting kits are available.

Features:

- Install TWO Sonos® AMP Streaming Amplifiers into a single enclosure!
- Easy No-Drill Installation! Mounting system specifically designed for use with the SONOS® AMP
- Mirrors inside enclosure provide visibility to controls and indicator lights
- Dual thermostat controlled cooling fans with 4" vents, rain shields and screens
- No electrical wiring required, pre-wired 5 foot 3-Prong power cord
- Removable Access Panel with (4) Pre-Wired 120VAC Outlets
- Custom cable glands can support up to 5 pre-terminated cables through each
- Stainless Steel Hinges with High Quality 316 Steel Hinge Pins
- Stainless Steel Quick Release Latches with Padlock Hasps
- Fiberglass Reinforced Polyester, FRP
- Weatherproof, UV Stable and Highly Corrosion Resistant
- NEMA Type 3R, 3RX / IP24 Rated
- Includes Cable Glands and Stainless Steel Mounting Feet
- Pole Mounting Kit Available
-

Applications:

- Pool side, backyard audio/video entertainment systems
- Outdoor hotel and hospitality audio/video entertainment systems
- Marine audio entertainment systems
- Protection of equipment from theft or damage

Copyright (C) 2025 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

Product Photos

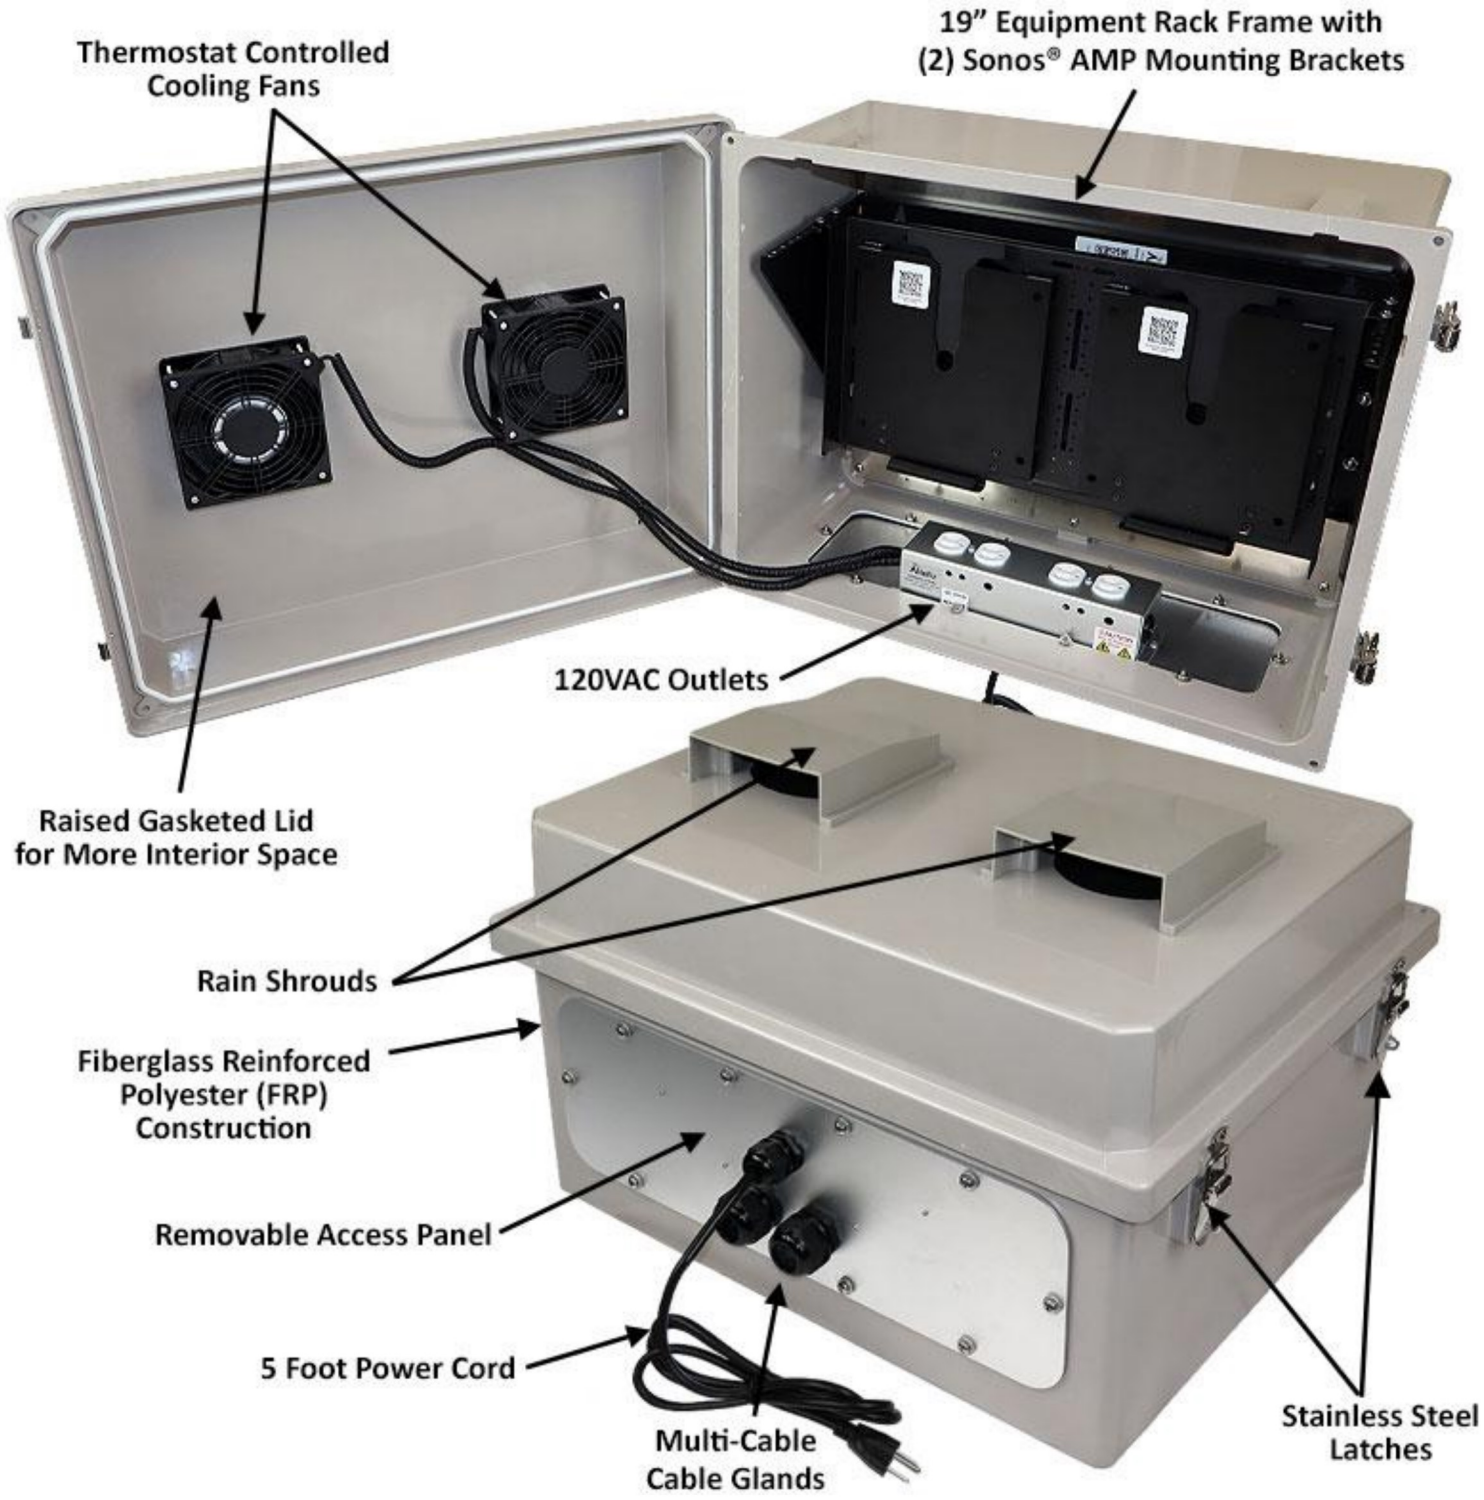

Copyright (C) 2025 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

Product Photos

Copyright (C) 2025 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

Specifications

Material	Fiberglass Reinforced Polyester
Color	Gray
Voltage	120VAC
Max Load	10A @ 120VAC
Cooling Fan Turn-On Temperature	100°F (38°C)
Cooling Fan Turn-Off Temperature	79°F (26°C)
Outer Dimensions	17.9 x 21.8 x 14.3 Inches (454 x 553 x 363 mm)
Inner Dimensions	14.7x 18.7 x 9.5 Inches (374 x 475 x 241 mm)
Weight	36 lbs. (16.3 kg)
Power Cord Length	5 Foot (1.5m)
Ratings	NEMA Type 3R, 3RX / IP24
Flame Rating	UL94-5V
Compatible Sonos® Models	Sonos® AMP

Shown with mounting brackets installed.

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com

Copyright (C) 2025 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.