

# Product data sheet

Specifications



## APC Smart-UPS X External Battery Pack, Rack/Tower 2U, 120Vdc, W/rail kit

SMX120RMBP2U

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Overview

**Lead time** Usually Ships within 2 Weeks

### Main

**Product or Component Type** External battery pack

**Number of rack unit** 2U

**Battery Type** Lead-Acid battery

**Provided Equipment** Installation guide  
Rack Mounting brackets

**Range of Product** Smart-UPS Battery Systems

### Batteries & Runtime

**Battery blocks per string** 10

**Device mounting** Enclosed battery cartridge

**Included Battery Modules** 0

**Battery Slots Empty** 0

**RBC Quantity** 2

**Battery Voltage** 120 V

**Replacement battery** [APCRBC118](#)

### Physical

**Color** Black

**Height** 3.3 in (85 mm)

**Width** 17.008 in (432 mm)

**Depth** 26.3 in (667 mm)

**Net Weight** 124.25 lb(US) (56.36 kg)

**Mounting Mode** Rack-mounted

**USB compatible** No

### Environmental

**Ambient Air Temperature for Operation** 32...104 °F (0...40 °C)

**Relative Humidity** 0...95 %

**Operating altitude** 0...10000 ft

**Ambient Air Temperature for Storage** 5...113 °F (-15...45 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Storage Relative Humidity	0...95 %
Storage altitude	0...50000 ft (0...15240 m)

## Ordering and shipping details

Category	11309-APC RESALE PRODUCTS
Discount Schedule	APC1
GTIN	731304295839
Returnability	No
Country of origin	PH

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.646 in (24.500 cm)
Package 1 Width	23.622 in (60.000 cm)
Package 1 Length	33.858 in (86.000 cm)
Package weight(Lbs)	141.096 lb(US) (64.000 kg)
Unit Type of Package 2	P12
Number of Units in Package 2	2
Package 2 Height	35.433 in (90.000 cm)
Package 2 Width	31.496 in (80.000 cm)
Package 2 Length	47.244 in (120.000 cm)
Package 2 Weight	308.647 lb(US) (140.000 kg)

## Contractual warranty

Warranty (in months)	24
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 291 kg CO2 eq.

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

5ac12844-46eb-471b-94f1-318e06a714a6

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Longer

### Lifetime extension

Repair No

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Removable battery User replaceable

Take-back Yes


WEEE Label

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions

---

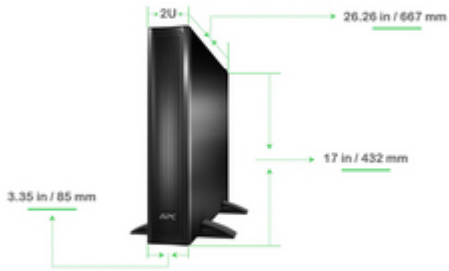

Offer Marketing Illustration

Product benefits / Features

---



Offer Marketing Illustration

Product benefits / Features

---

**Extended Runtime**



Compatible with  
Smart-UPS X > 2kVA models



Combine up to 10 battery packs  
for extended runtime



Offer Marketing Illustration

Product benefits / Features

---



**Peace of Mind**  
Ensure that your equipment remains powered,  
protected and available in any scenario.

**2-year**  
Repair or replace

Offer Marketing Illustration

Product benefits / Features

---

Specifications



Image of product / Alternate images

Alternative

---



