

NDAA/TAA
COMPLIANT PRODUCT




- 4/16 CHANNELS**
Live Monitoring
- 4K**
Resolution
- Easy Device Registration**
- HD, VGA**
Outputs
- Text Overlay**
- 5 YEAR**
Warranty

Summary

DW® Spot™ monitoring modules are NDAA/TAA compliant monitoring modules that let you view video from up to sixteen (16) cameras without connecting to them through a PC or server. The DW-HDSPOTMOD and DW-HDSPOTMOD16 are easy to use, automatically searching the network and identifying an unlimited number of ONVIF conformant IP cameras, UHDoC® VMAX® A1™ DVRs (via RTSP) or VMAX® IP Plus™ NVRs for local monitoring at up to 4K resolution output. The DW® Spot™ monitoring modules are ideal for retail and office environments, as well as for security personnel and is backed by DW's unbeatable 5 year warranty.


Features

- Automatic network search and device registration
- Identifies an unlimited number of ONVIF conformant IP cameras and:
 - VMAX A1 G4™ DVRs
 - VMAX® IP G4™ NVRs
 - VMAX A1 Plus™ DVRs
 - VMAX® IP Plus™ NVRs
 - VMAX® A1 DVRs
- Live monitoring of up to 16 cameras view, single, quad, nine and 16-channel split and camera sequencing
- Up to 120fps display (DW-HDSPOTMOD)
- Up to 480fps display (DW-HDSPOTMOD16)
- Drag and drop camera selection from DVRs and NVRs
- Remote configuration via the Internet
- Supports up to 4K resolution cameras, max. 80 Mbps throughput
- 4K (3840 x 2160) true HD and VGA video outputs
- USB mouse included
- Velcro for easy mounting to the back of a monitor
- NDAA/TAA compliant
- 5 year warranty

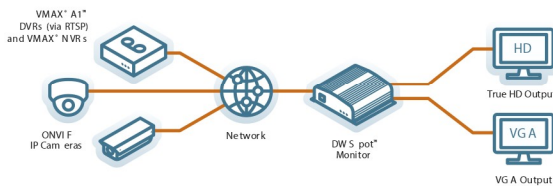

Dimensions

Unit: inch (mm)

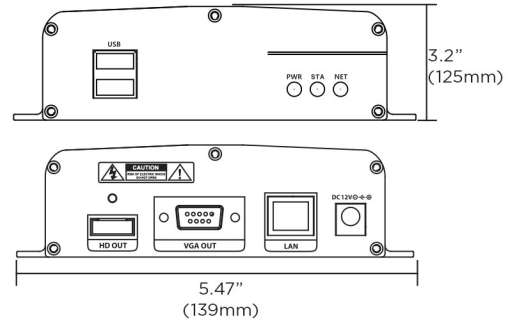

Specifications

OPERATIONAL		DW-HDSPOTMOD	DW-HDSPOTMOD16
Operating system		Embedded Linux®	
Video compression		H.265, H.264	
Video in	Input	4 channels	16 channels
	Protocol	ONVIF	
	Input resolution	IP cameras (up to 4K, 3840x2160 resolution), Universal HD over Coax® VMAX® A1 G4™ and VMAX® A1 Plus™ DVRs, and VMAX® IP G4™ and VMAX® IP Plus™ NVRs.	
Video output display	Speed	Up to 120fps	Up to 480fps
	Maximum throughput	80 Mbps	80 Mbps
	Monitor	True HD and/or VGA	
	Resolution	True HD: 3840x2160, 1920x1080, 1280x720, 1024x768 VGA: 1920x1080, 1280x720, 1024x768	
Screen mode	1, 4, sequence	1, 4, 9, 16, sequence	
LAN		10/100/1000 Base-Tx Ethernet (RJ-45)	
Protocols		TCP/IP (STATIC, DHCP), DDNS and UPNP	
Streaming		Dual-streaming	
Network function		Time synchronization by NTP server	
Remote management	Web (IE)	System settings	
System recovery after power failure		Auto-reboot and log file system	
Advanced functions	Firmware upgrade by USB and CMS		
	Import and export settings		
	Digital zoom		
System operation		USB mouse	
ENVIRONMENTAL			
Surge Protect	ESD	Air ±15KV / Contact ±10KV	
	Surge	Video IN ±4KV (Line to Line 1.2us/50us)	
Power		DC12V, 1A	
Operating temperature		41°F - 104°F (5°C - 40°C)	
Operating humidity		20-90% RH (non-condensing)	
Dimensions		5.47" x 4.84" x 1.25" Inch (139 x 123 x 32 mm)	
Warranty		5 year warranty	



Built for Users.™

