

Bridge 304+

Wisenet SKY Bridge



The Wisenet SKY Bridge acts as a gateway from your premises to the Cloud Data Center where your video is stored by the Wisenet SKY Cloud VMS. It provides a secure connection, video buffering, bandwidth management, and monitoring of cameras.

Network features

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection / reporting
- Network disconnected alerts

Standard Support (Included)


- Free of charge with an active subscription
- Bridge - Lifetime warranty
- 24/7 email and web support
- 8AM to 6PM phone support

Management features

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts



FRONT

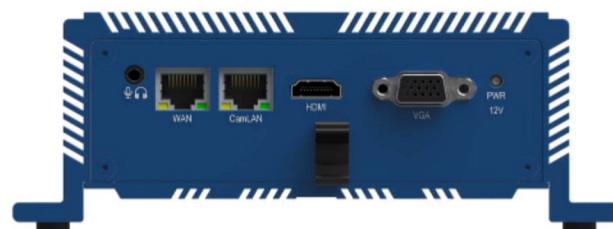

BACK

Max Cameras*	Up to 20 IP Cameras @4MP
Max Analytic Count*	5
LPR Support*	No
Video Buffer	2 days on premises
POE Camera Ports	None
Network Ports	Dual Gigabit
Video Output	HDMI (1), DP (1)
Dimension	180 x 127 x 64mm 7.08 x 5.00 x 2.50in
Weight	1.20kg (2.65lbs)
Maximum Power Consumption	External 100-240 VAC, 20 W
Operating Temperature Range	-10-50° C (14-122°F)
Operating Humidity Range	0-70%
Certifications	FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick
Rapid Replacement Part Numbers	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)

* Typical - please utilize the Wisenet SKY Product Wizard for precise capacity