

ULTRA Series

UL-508POE (VBS-HDIP-508POE)

Just Add
Power
AV over IP Solutions

4K Standard Decoder (Receiver)

The Ultra Series 508POE Decoder (Receiver) distributes 4K video and supports all audio formats over a single Cat5e or greater network cable.

The 508POE Decoder (Receiver) processes a 4K or lower-resolution source from a Just Add Power Encoder (Transmitter) and distributes video to the designated display; features enhanced image play: image push, image pull, and image pop - along with all the 4K Decoder (Receiver) system wide features from the Ultra Series product line.



Features


HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Image Pull	Preview an image from any source or display in any web browser or control system - up to 10 fps
Image Pop	Display a custom logo or message as an overlay on any active screen	Integrated Endpoint Control	Control endpoints with RS232, IR and CEC
Image Push	Load a custom default image or logo for when no source is displayed onscreen	Scalability	Fully compatible with all Ultra and Omega products
		Video Rotation	Rotate your video by 90° for portrait or landscape display

ULTRA Series

UL-508POE (VBS-HDIP-508POE)


Just Add
Power
AV over IP Solutions

Front of Device:

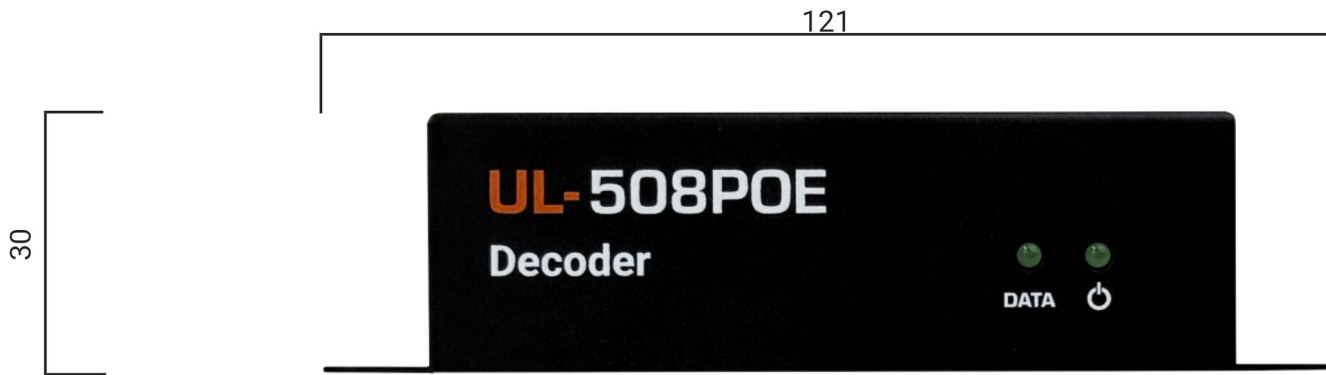

All measurements in millimeters (mm)

Back of Device:

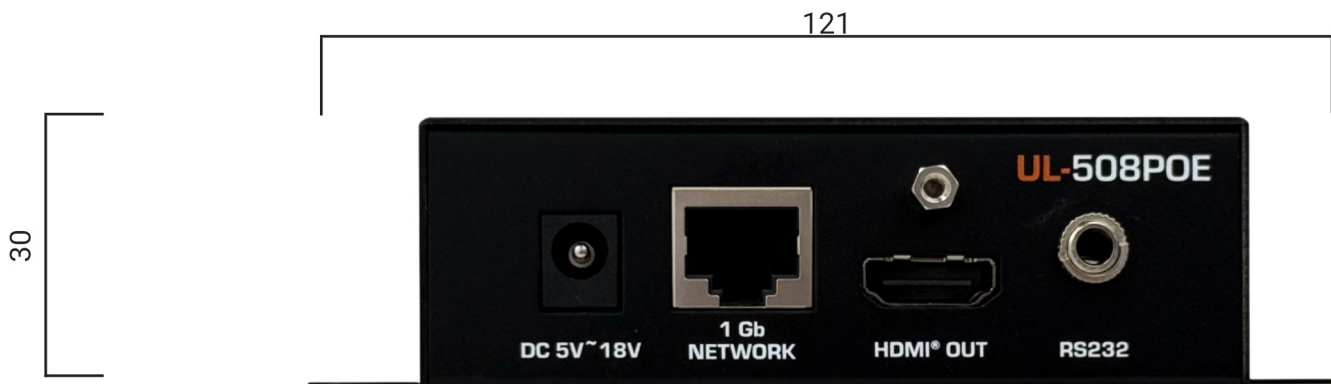

All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	POE	IEEE 802.3af (10W)
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI Out 3.5mm RS232 w/null modem
Dimensions & Weight	121 x 30 x 125 mm 4.8" x 1.2" x 4.9" in 0.27 kg / 0.6 lb	Power Supply (not included)	5V-18V 5.5mm/2.1mm, Positive tip
Encryption	AES-128 Encryption	Supported Audio & Video	Audio: All Audio Formats Video: Up to 4096x2160 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		