

ULTRA Series

UL-518AVP (VBS-HDIP-518AVP)

Just Add
Power
AV over IP Solutions

4K Decoder (Receiver) with USB and Stereo Audio Out

The Ultra Series 518AVP Decoder (Receiver) distributes 4K video and supports all audio formats over a single Cat5e or greater network cable.

The 518AVP Decoder (Receiver) processes a 4K or lower-resolution source from a Just Add Power Encoder (Transmitter) and distributes video to the designated display; supports analog audio output with amp and delay; features integrated endpoint control and KVM support - along with all the 4K Decoder (Receiver) system wide features from the Ultra Series product line.



Features


Image Pop	Display a custom logo or message as an overlay on any active screen	Integrated Endpoint Control	Control endpoints with RS232, IR and CEC
Image Push	Load a custom default image or logo for when no source is displayed onscreen	KVM Support	Provides a local keyboard, mouse, touchscreen, gaming controller, joystick, or webcam with remote access to any computer on the system.
Image Pull	Preview an image from any source or display in any web browser or control system - up to 10 fps	Video Rotation	Rotate your video by 90° for portrait or landscape display

ULTRA Series

UL-518AVP (VBS-HDIP-518AVP)

Just Add
Power
AV over IP Solutions

Front of Device:

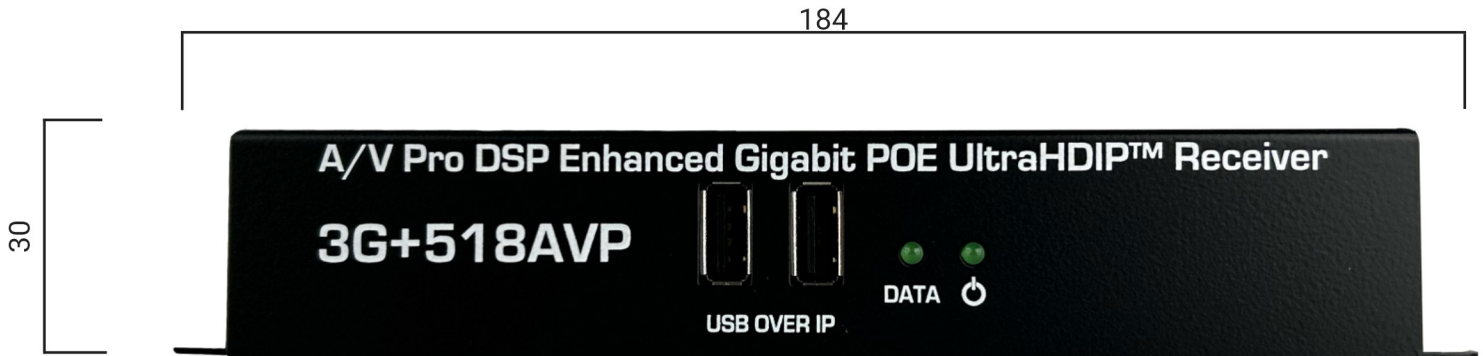

All measurements in millimeters (mm)

Back of Device:



All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	POE	IEEE 802.3af (10W)
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	USB 2.0 (2x) (front of device) Gigabit Ethernet HDMI Out 3.5mm Stereo Out 3.5mm RS232 w/null modem
Dimensions & Weight	184 x 30 x 127 mm 7.2" x 1.2" x 5.0" in 0.45 kg / 1.0 lb	Power Supply (not included)	5V-18V 5.5mm/2.1mm, Positive tip
Encryption	AES-128 Encryption	Supported Audio & Video	Audio: All Audio Formats. Adjustable Volume and Delay. Video: Up to 4096x2160 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		