

# Premium Speaker Cable

## Round HD Jacket

### Indoor/Outdoor Rated - 14AWG


#### Key Features

- Oxygen-Free Copper Conductors
- Round HD Jacket for Superior Flexibility
- Twisted Pair
- High Strand Count for Minimal Distortion
- Riser Rated: UL CMR FT4 Rated
- UV Protected for Seamless Indoor/Outdoor Installs
- Tangle-Free Reellex II Box, Reel-in-Box or Wooden Spool
- CPR EuroClass: Dca
- Limited Lifetime Warranty
- RoHS, REACH, CE



#### Description

Pro-Grade HD Speaker Cable, Indoor/Outdoor Rated - 2 or 4 Conductor, Insulated, Twisted, Unshielded, 14AWG 105 Strand Oxygen-Free Copper, Riser Rated UL CMR cUL FT4, UV Sun Resistant HD PVC Jacket, Reellex II Tangle Free Box, Reel-in-Box or Wooden Spool. EU Warehouse version CPR Compliant EuroClass: Dca-s3,d2,a3

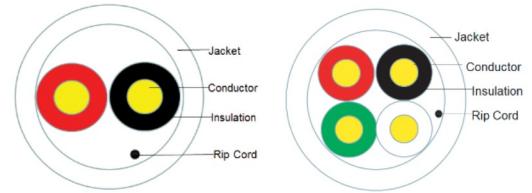

#### Applications

Speaker Level Audio for Commercial and Residential, Home Theater, Permanent and Semi-Permanent Installations, In-Wall Riser, Outdoor with UV Protected PVC Jacket.

#### Construction

<b>Conductor</b>	Material	Oxygen-Free Bare Copper	<b>Rip Cord</b>	Yes, Nylon				
	Solid/Stranded	Stranded (105/0.16mm +/-0.004mm)		<b>Drain Wire</b>	none			
	Size	14 AWG			<b>Jacket/Sheath</b>	Material	PVC - UV Sun Res	
	Insulation Material	PVC				Nominal Jacket Thickness	0.95mm	
	Insulation OD Avg.	0.36mm				Color Code	Per Request	
	Color Code	Pr1: Black, Red; Pr2: Green, White				<b>Overall Cable Diameter (OD)</b>	1 pair: 7.40 +/-0.2mm;	
	Twisted Pair	2 Cores to Pair					2 pair: 8.5 +/-0.2mm	
	Insulated Conductor OD	2.7mm +/-0.10mm						
	Lay Length	33 mm						
	Twists per foot/meter	30/meter						
<b>Shielding/Screen</b>	Type	Unshielded						
	Material	na						

#### Mechanical Properties

<b>Bend Radius</b>	Min Bend Radius (Installation)	1 pair: 57.6mm; 2 pair: 66.4mm
	Min Bend Radius (Operation)	1 pair: 57.6mm; 2 pair: 66.4mm
<b>Insulation Tensile Strength</b>	Unaged / Elongation %	13.8Mpa / 100%
	Aged / Elongation %	11.7Mpa / 50%
<b>Jacket/Screen Tensile Strength</b>	Unaged / Elongation %	13.8Mpa / 100%
	Aged / Elongation %	11.7Mpa / 50%
<b>Cable Cold Bend (-20°C for 4 hrs)</b>	No Crack	

#### Standards Reference

**Manufactured in Accordance to:** UL 444, UL 13, NEC Article 725, RoHS, REACH, CE

**North America Installation Rating:** Riser Type UL CMR cUL FT4 ; NEC Type CL3R/CL2R 75°C

**EU (EMEA) Installation Rating:** EN50575 EuroClass Dca-s3,d2,a3

#### Environmental Compliance

RoHS Compliant: RoHS II/III, EU/UK RoHS  
REACH, WEEE Directive, WFD:2023, SCIP:2023, POPs (EU) No 2019/1021

**Electrical Characteristics**

<b>DC Resistance (at 20°C)</b>	Max 8.8 ohm/km	<b>Maximum Current (25°C)</b>	12A
<b>Insulation Resistance (at 20°C)</b>	Min 50M ohm/km	<b>Rated Voltage</b>	Insulated - 300V
<b>Mutual Capacitance</b>	1pair: 57.6mm; 2pair:66.4mm		Operating Low Voltage - 80V
<b>Impedance</b>	62+/-60HM	<b>Test Voltage Between Conductors</b>	2.5kv/2s
<b>Inductance</b>	1pair: 0.032µH/m; 2pair: 0.023µH/m		

**Environmental Parameters**

<b>Temperature Range - Operating</b>	-20°C to 75°C (-4°F to 167°F)	<b>Temperature Range - Storage</b>	0°C to 40°C (32°F to 104°F)
<b>Temperature Range - Installation</b>	0°C to 40°C (32°F to 104°F)		

**Part Numbers**

Item No.	UPC	Jacket Color	Package Length	Package Type	Package Weight (lb/kg)	Item Dimensions (mm)
<b>North America:</b>						
14/20FC-HD-BK	817777013207	Black	500ft/152m	Reelex II Box	26.4/12	350*260*350
14/20FC-HD-BK-HDBX	810070019204	Black	500ft/152m	Reelex II HDBox	26.4/12	343*258*353
14/20FC-HD-PUR	810070018061	Purple	500ft/152m	Reelex II Box	26.4/12	350*260*350
14/20FC-HD-WT	810070016418	White	500ft/152m	Reelex II Box	26.4/12	350*260*350
14/20FC-HD-WT-HDBX	810070010546	White	500ft/152m	Reelex II HDBox	26.4/12	343*258*353
14/40FC-HD-BK	817777013689	Black	500ft/152m	Reel-in-Box	49.10/22.32	310*340*350
14/40FC-HD-PUR	817777010442	Purple	500ft/152m	Reel-in-Box	49.10/22.32	310*340*350
14/40FC-HD-WT	810070016401	White	500ft/152m	Reel-in-Box	49.10/22.32	310*340*350
<b>Europe (EMEA):</b>						
14/20FC-HD-BK-D	817777015065	Black	500ft/152m	Reelex II Box	26.4/12	350*260*350
14/20FC-HD-BK-D-1000	810093721269	Black	1000ft/305m	Wood Spool	52.8/24	360*260*160
14/20FC-HD-PUR-D	817777015072	Purple	500ft/152m	Reelex II Box	26.4/12	350*260*350
14/20FC-HD-WT-D	817777015089	White	500ft/152m	Reelex II Box	26.4/12	350*260*350
14/20FC-HD-WT-D-1000	810093721276	White	1000ft/305m	Wood Spool	52.8/24	360*260*160
14/40FC-HD-BK-D	817777015102	Black	500ft/152m	Reel-in-Box	49.10/22.32	310*340*350
14/40FC-HD-BK-D-1000	810093723843	Black	1000ft/305m	Wood Spool	98.20/44.64	380*300*160
14/40FC-HD-WT-D	817777015119	White	500ft/152m	Reel-in-Box	49.10/22.32	310*340*350

SCP has made every reasonable effort to ensure the accuracy of the information in this document. SCP reserves the right to modify or change information herein at any time without notice due error correction, specification changes, ongoing technical developments, and/or any reason. SCP disclaims all representations or warranties, whether express, statutory or implied regarding the information contained herein. Under no circumstance will SCP be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever. Dimensions and weights are for reference purposes only and are subject to change. Regulatory information is for guidance purposes only. All warranty information is available can be viewed at [www.scp5e.com](http://www.scp5e.com) © 2025 Structured Cable Products (SCP). All rights reserved.