




Structured Cable Products®

Quality Installations Deserve Quality Products

www.scp5e.com
 sales@scp5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 22/4-XX | 22/4-XX-500

4C/22 AWG STRANDED BC, UL CMR PVC JKT - 500 FT COIL

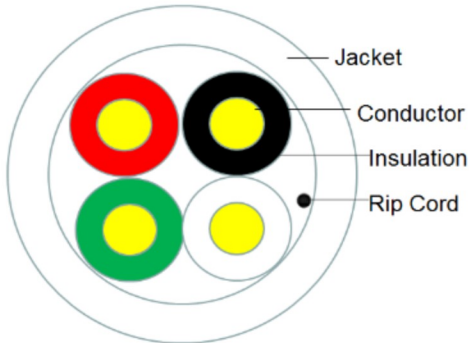

Part Number:	Jacket Color:
22/4-GY	Gray
22/4-GY-500	Gray
22/4-WT	White
22/4-WT-500	White

Standard: UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant

Construction Characteristics:

Conductor	Material	Bare Copper
	Size	22AWG X 4C
	Construction	7/0.25+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.18mm
	AVG.Thickness	0.20mm
	Diameter	1.1+/-0.05mm
	Colors	Black & Red & White & Green
Jacket	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.40mm
	Diameter	3.5+/-0.20mm
	Rip Cord	Nylon
	Color	Varies
Bend radius	Min 15D/55mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance(22AWG)	Max 53.5ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Insulation Resistance	Min 50MΩ*km at 20°C
Rated Voltage	Max 300Volts

Marking:

STRUCTURED CABLE PRODUCTS --- 22/4COIL --- SECURITY CABLE UNSH 4C 22
 AWG STRANDED--- E198134 SCP3 (UL)C(UL) CMR ---PVC JKT RoHS EC
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXXFEET

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
4.4kgs	240x200x240	500ft/Box	100
7.8kgs	280x260x280	1000ft/Box	64