



## 86 Series - 70/25V 2'x2' Grille In-Ceiling Contractor Speaker

**G86TG2X2** 8" 70/25V 2'x2' grille in-ceiling speaker

**G86TG2X2C** 8" 70/25V 2'x2' grille in-ceiling speaker with volume control knob

### Features

- Square style white steel grille
- 70/25V transformer with colored leads
- "C" models features volume control knob centered on grille
- Manufactured to comply with RoHS standards
- Lifetime warranty

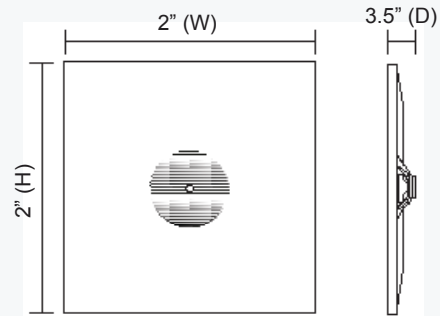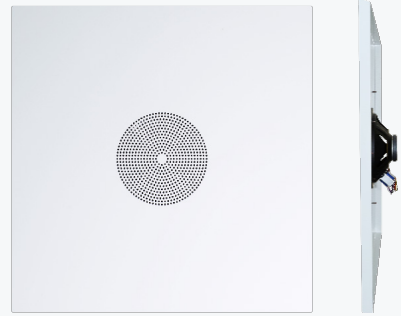

### Specifications

	<b>G86TG2X2</b>	<b>G86TG2X2C</b>
RMS Power .....	10W	10W
Max. Power.....	15W	15W
Transformer Type .....	70/25V	70/25V
Transformer Power Type .....	5W, 2.5W, 1W, 0.5W, 0.25W & 8 Ohms	5W, 2.5W, 1W, 0.5W, 0.25W & 8 Ohms
Termination Type .....	Colored leads	Colored leads
Sensitivity (1W/1M).....	90dB	90dB
Maximum SPL (Pax/1M).....	100dB	100dB
Driver Impedance .....	8 Ohms	8 Ohms
Magnet.....	5 oz. ferrite	5 oz. ferrite
Frequency Response Range.....	85Hz ~ 20kHz	85Hz ~ 20kHz
Dispersion @ 1000Hz.....	120° Conical	120° Conical
Driver .....	8" paper cone woofer, .8" dual cone tweeter	8" paper cone woofer, .8" dual cone tweeter
Speaker Dimensions.....	2" (W) x 2" (H) x 3.5" (D)	2" (W) x 2" (H) x 3.5" (D)
Minimum Mounting Depth.....	2.7"	2.7"
Weight .....	10.5 lbs.	10.6 lbs.
Material.....	Grille: steel	Grille: steel
Color.....	Off-White	Off-White

**NDAA**  
COMPLIANT

\*Products are in compliance with NDAA Section 889 Part B Guidelines

Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 2/23/22

### Optional Accessory



**STH8**  
Heavy Gauge  
Steel Backcan