



1
OUTLET

SMART
OUTLET

PR-S1PI



OFFSET OUTLET FOR
LARGE POWER SUPPLY



FULL CONTROL
OF OUTLET



POWER METERING



MAVBASE APP
MANAGEMENT



SELF HEALING
AUTO REBOOT



360° ROTATING BODY
FOR EXTRA SPACE



WIRELESS
CONNECTIVITY



SET MULTIPLE
SCHEDULES

INTELLIGENT POWER

Big Dog Power provides controlled AC power to your equipment. 1 controlled outlet provides up to 15 amp current. Wi-Fi connection allows for flexibility with placement and network connectivity. The built in Self-Healing functions of the PR-S1PI will keep your network connected equipment going by automatically rebooting and maintaining the equipment.

Specifications:

OPERATING TEMPERATURE: 32°F - 77°F (0°C - 25°C)

SURGE PROTECTION: N/A

INTERNAL ANTENNA: Yes

OUTLETS (TOTAL): 1 outlet

SWITCHED OUTLETS: 1

CORD LENGTH: N/A

SAFETY CERTIFICATIONS:
UL 498A+UL 244A+UL498A
FCC Part15B+ICES-003

WARRANTY: 3 Year Limited



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



MetraAV
BigDogPower.com
APP: MAVbase.com
386-255-0234



1 OUTLET SMART OUTLET



PR-S1P1

FEATURES

- Single controlled outlets
- Wall Tap / Plug design
- 360° continuous rotation
- Self-Healing functions for network connected equipment
- Web and Mobile app for remote management and notification
- IP automation integration
- 120V/15A Rating

Self-Healing Relay for Automatic Rebooting

The smart outlet has a contact closure and sensing relay capabilities, which means it can automatically reset the outlet that are not on the network. Automate an outlet reset process so you can experience your smart home technology without inconvenient interruptions requiring service calls or visits.

Prevent Technical Issues Before they Happen


Reduce service calls by programming connected devices to auto reset on an ongoing schedule.

Integrate with the Best

Big Dog Power products are “automation-ready” for Control4 and Crestron, with more platforms coming soon so you can continue managing your devices through the same control system app.

Manage Everything from One App

An intuitive app design provides a simple user experience for homeowners to manage connected devices. Integrators can monitor all of their clients within the MAVbase app with the option of either remote or direct access. Direct access allows integrators to login and program the PDU without internet.

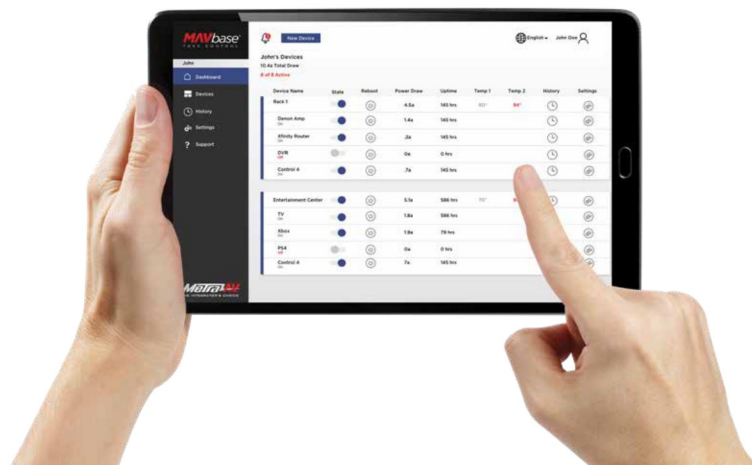

Device Name	State	Reboot	Power Cycle	Uptime	Temp 1	Temp 2	History	Settings
Block 1	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙
Control 4	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙
Entertainment Center	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙
TV	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙
Music	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙
PC	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙
Control 4	On	⊙	⊙	100 hrs	50°	50°	⊙	⊙