


Cherry Bomb

Less Work. More Play.

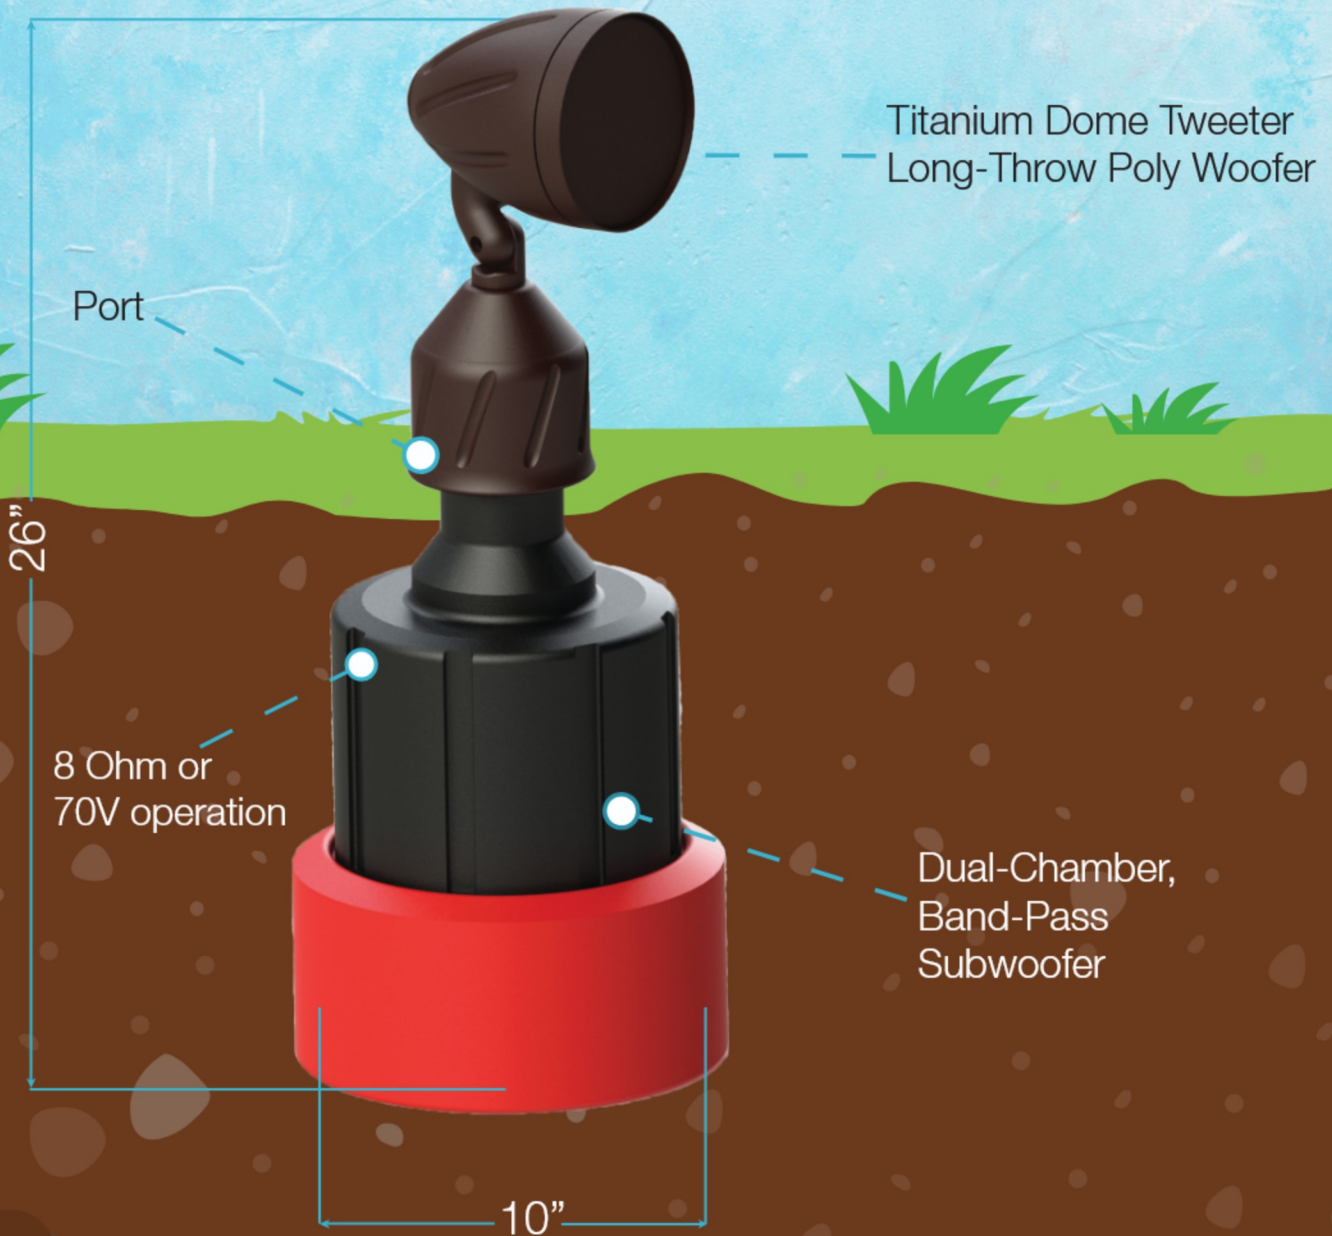

Rockustics®

Rockustics® by MSE Audio® | 10661 Rene St. | Lenexa, KS 66215
913-663-5600 or 855-663-5600 | www.rockustics.com

Rev 7.09.2019

The Cherry Bomb is a full-range solution for modern landscape audio.

The Cherry Bomb's patented three-way design includes a 5" dual-chamber, band-pass subwoofer, a 4" woofer, and a .75" tweeter all in one small unit.

The combination of small form factor and full-range audio performance equals faster installation times: dig only one hole for installation, versus digging two or more holes with most other landscape audio systems! You're running less wire, making for less splices; not to mention there is no separate subwoofer amp needed with the Cherry Bomb.

The patented design doesn't just save you installation time, it also sounds better: Since the low, mid and high frequencies all originate from the same enclosure, everything is equidistant from the listening location, meaning all you hear is perfectly phase-matched full-range sound. A 64W, 70V transformer with bypass for 8 ohm direct is included with each Cherry Bomb.

The Cherry Bomb - Less Work, More Play.

CB 5



Description	5" Coax, Weatherproof, 3-Way Outdoor Speaker
Impedance	8Ω
Sensitivity dB @1W/1M	83.0 dB
Freq. Response	42 Hz - 22 kHz (-10 dB)
Max Program Power	100 Watts
Max Power SPL @ 1M	100 dB
Subwoofer	5.25" Polycone with Rubber Sound, 1-1/2 Voice Coil
Woofers/Midrange	4" Polycone with Rubber Sound
Tweeter	0.75" Titanium Dome
Inputs	Wire Leads
Enclosure Material	Rotational Molded LDPE Cabinet. Injection Molded UV Stable ABS Vent Cover and Satellite
Colors	Brown / Cherry Red
Height	26.50 in / 673.1 mm
Diameter	10.63 in / 269.9 mm
Weight	15.6 lb / 7.1 kg
Shipping Weight	16.5 lb / 7.5 kg