




RM69

ROLLS

Six Channel Mic/Line Mixer

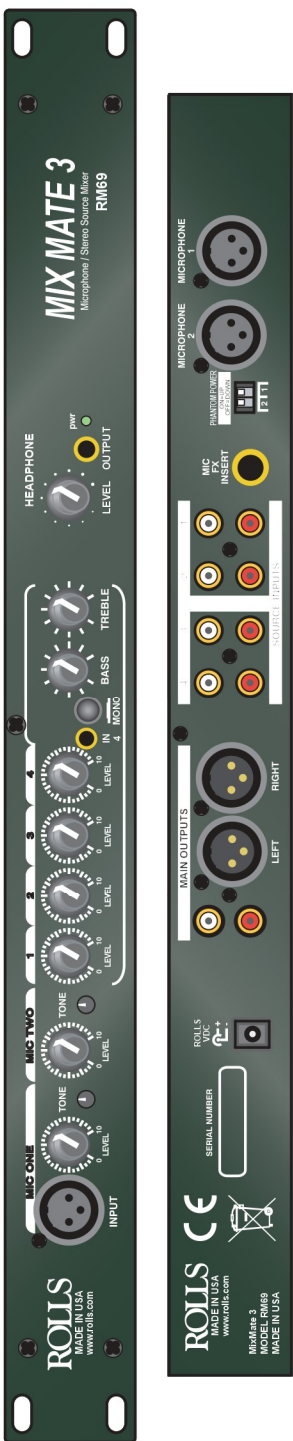

ROLLS SIX CHANNEL STEREO LINE/ Microphone Mixer

XLR OR RCA OUTPUTS

4 SOURCE INPUTS

2 MICROPHONE INPUTS

ROLLS

5968 SOUTH 350 WEST S.L.C., UT 84107

PHONE: 801-263-9053

FAX: 801-236-9068

The RM69 MixMate 3 is a six channel, single rack space, audio mixer with two microphone inputs and four stereo line inputs. The unit is ideal for installs such as restaurants or night clubs where space is a consideration, without compromising audio quality. A convenient front-panel 3.5mm jack has been included for connection to any standard MP3 player's output. High quality all metal chassis. MADE IN THE USA.

FEATURES:

- Two XLR Microphone Inputs (including a parallel front panel input)
- Individually switchable phantom power
- Four Stereo Source Inputs. Four RCA and one front panel stereo 3.5mm
- Stereo RCA Outputs or XLR Balanced
- 1/4" TRS Mic Insert jack

SPECIFICATIONS

Input Impedance:	Mic: 600 Ohms XLR balanced
	Source: 22K Ohms RCA
	Mic Insert: 22K Ohms 1/4" TRS insert
Max Input Level:	Mic: -14 dBV Mic level
	Source: 24 dBV
Headphone Output Impedance:	>8 Ohms
Total - In/Out Connectors:	5: XLR, 5: Stereo RCA, 1: 1/4" TRS, 2: 3.5mm
Phantom Power:	+15 VDC
Output Level:	+17 dBV max
Output Impedance:	100 Ohms Balanced
Max Gain:	Mic: 60 dB
	Source: 26 dB
Tone Controls:	+/-12 dB 100 Hz Bass
	+/-12 dB 11kHz Treble
Noise Floor:	- 80 dB, THD: <.025%,
S/N Ratio:	96 dB
Size:	19" x 1.75" x 4" (48.3 x 4.5 x 10 cm)
Weight:	5 lbs. (2.3 kg)

MADE IN USA



6 75889 00690 2